

GLOBAL *Shine*

Colour your world...!

PRODUCT CATALOGUE

SUPERIOR RANGE OF
DECORATIVE PRODUCTS





ABOUT US

GLOBAL SHINE PAINTS PVT. LTD. has come a long way since it started in 2020. It was started as a firm by Founder Mr MANISH KUMAR who were willing to take on the most trusted, famous and biggest brands of India. Over the course of 5 years GLOBAL SHINE PAINTS became corporate force and one of India's most trusted brands. Today it is worth 20 times of what we started. The ambitious project of 'GLOBAL SHINE PAINTS' rests on solid grounds of infrastructure and supply chain management. It has set up its indigenous state-of-the-art production plant at ALWAR, (Rajasthan), PATNA (BIHAR). Laced with high precision equipment, this manufacturing unit has an output capacity of 20,000 MT/KL per annum.

Modern automatic machines and advanced Research & Development laboratories label every GLOBAL SHINE PAINTS product with high quality standards that guarantee ultimate customer satisfaction. Supporting the technical efficiency is the present stock availability of 6 sales Depots and 42 DISTRIBUTOR'S POINT. These product stock stations prove highly effective in the distribution channel. They enable smooth and uninterrupted supply of 'GLOBAL SHINE PAINTS' products throughout the massive network of 300 dealers & distributors of GLOBAL SHINE spread across India. Making its presence felt in the market 'GLOBAL SHINE PAINTS' is available in a wide range of decorative paint products that like Exterior & Interior Emulsions, Cement Paints, Water based Primers, Acrylic Distempers, Synthetic & GP Enamel, Solvent based Primers, Wood Finishes and Aluminum Paints and Stainer. Whatever may be the surface area, we have all the best color solutions for you.

OUR VISION

GLOBAL SHINE PAINTS PVT. LTD. and Home Improvements, home of the "Hassle-Free" experience. At Mission, we pride ourselves on the best & highest quality painting services you'll find from any painting company in Overland Park. That's why we guarantee you a hassle-free experience with no surprise. We've won Angie's List's Super Service Award every year possible. Tired of the uncertainty of hiring a local painter? No matter whether you're in need of interior painting, exterior painting, or just general home painting services, at Mission we will get your home painting project

done right, on time, and on budget, guaranteed. At Vision Painting, we strive to achieve total customer satisfaction. We accomplish this with superb service, high quality work, and a team that is committed to meeting budgets and time lines. We understand and accommodate to each client and their specific needs. Over the years, we have completed thousands of successful commercial and residential projects and have become Indianapolis's favorite painting and drywall contractor. The common thread is integrity, professionalism, and attention to detail. We are committed to hiring and retaining the most competent staff. Our people make the difference and we are proud to show you why Vision Painting has earned such a great reputation.

OUR MISSION

- We are committed to be the best organization among building material manufacture.
- Customer Relationship and satisfaction is our prime duty and responsibility.
- Moving a step towards.
- Retail profit & customer retention.
- Customer quality Satisfaction.
- Painter Relationship, profit and satisfaction.
- Maintaining of Corporate social responsibility.



TEJAS Glow

INTERIOR EMULSION SMOOTH WALL FINISH

LEVEL
TRACTOR SPARC

Tejas Glow Interior Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Interior Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Tejas Glow Interior Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



FAST
DRYING
SKILL



EXCELLENT
HIDING
CAPACITY



HIGH
COVERAGE



VALUE FOR
MONEY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.



Spot light

PREMIUM QUALITY EXTERIOR EMULSION HD MATT FINISH

LEVEL
ACE SPARC

Rang Vilas Exterior Emulsion is a premium quality with the state of art technology having smooth and uniform finish which is used to give the excellent and beautiful colours to your exterior walls.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Interior Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Rang Vilas Emulsion Exterior Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



SUPER
SMOOTH
FLOW



PURE
BRIGHT
FINISH



EXCELLENT
HIDING
CAPACITY



HIGH
COVERAGE

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.





PearlauraTM

INTERIOR EMULSION SMOOTH WALL FINISH

LEVEL
TRACTOR
EMULSION

Pearl Aura Interior Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Interior Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Pearl Aura Interior Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



EXTRA
BRIGHT &
HIGH COVERING



ANTI FUNGUS
& HIGH
COVERING



EXCELLENT
HIDING
CAPACITY



DUST PROOF
& ECO FRIENDLY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.



Rang VilasTM

WEATHER PROOF EXTERIOR EMULSION HD MATT FINISH

LEVEL
ACE
EMULSION

Rang Vilas Emulsion is a premium quality with the state of art technology having smooth and uniform finish which is used to give the excellent and beautiful colours to your exterior walls.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Interior Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Rang Vilas Emulsion Exterior Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



SUPERIOR
BRIGHTNESS



SUPER SMOOTH
& MATT FINISH



EXCELLENT
HIDING
CAPACITY



HIGHEST
COVERING &
WEATHER
GUARD

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.





PearlauraTM ADVANCE

HI-SHEEN LUXURY INTERIOR EMULSION SMOOTH WALL FINISH

LEVEL
APCOLITE EMULSION

Pearl Aura Advance Hi-Sheen Luxury Interior Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Interior Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Pearl Aura Interior Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



FUNGUS & WATER RESISTANCE



FAST DRYING & EXTRA SHINE



EXCELLENT HIDING CAPACITY



HIGH COVERAGE & SMOOTH FINISH

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.



Rang VilasTM ADVANCE

WEATHER GUARD EXTERIOR EMULSION HD MATT FINISH

LEVEL
APEX EMULSION

Rang Vilas Advance Weather Guard Exterior Emulsion is a Luxury Quality with the state of art technology having smooth and uniform finish which is used to give the excellent and beautiful colours to your exterior walls.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Interior Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Rang Vilas Emulsion Exterior Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



WATER RESISTANCE



FAST DRYING & HIGHER COVERING



DUST PROOF & ECO FRIENDLY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.





2 YEARS WARRANTY*



FAST DRYING SKILL



EXCELLENT HIDING CAPACITY



HIGH COVERAGE



VALUE FOR MONEY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.



4 YEARS WARRANTY*



FAST DRYING SKILL



EXCELLENT HIDING CAPACITY



HIGH COVERAGE



VALUE FOR MONEY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.

ALL in one

LEVEL
ECO DUAL EMULSION

INTERIOR & EXTERIOR EMULSION UNIVEREAL SUPERIOR TOPCOAT

All in One Universal Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "All in One Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



ALL in one

LEVEL
PREMIUM 2in1 EMULSION

ADVANCE EMULSION (INT. EXT.) UNIVEREAL SUPERIOR TOPCOAT

All in One Universal Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "All in One Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.





CYCLONE

LEVEL
ROYAL
SHINE

INTERIOR LUXURY EMULSION

HI-SHEEN TOP COAT

Cyclone Interior Luxury Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Cyclone Interior Luxury Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



8 YEARS
WARRANTY



ULTIMATE
DURABILITY



TEFLON
SURFACE
PROTECTOR



SUPERIOR
CLEAN
ABILITY



VALUE FOR
MONEY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.



Rang Vilas™ ULTIMATE

LEVEL
APEX
ULTIMA

WEATHERPROOF EXTERIOR LUXURY EMULSION

HD MATT FINISH

Rang Vilas Ultimate Waterproof Exterior Luxury Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Rang Vilas Ultimate Waterproof Exterior Luxury Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.



8 YEARS
WARRANTY



ULTIMATE
DURABILITY



DUST
PROOF



SUPERIOR
CLEAN
ABILITY



VALUE FOR
MONEY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.



CYCLONE

LEVEL
ROYAL LUXURY
ADVANCE

INTERIOR ADVANCE LUXURY EMULSION

HI-SHEEN TOP COAT

Cyclone Interior Luxury Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "Cyclone Interior Luxury Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.

**8 YEARS
WARRANTY***



ULTIMATE
DURABILITY



TEFLON
SURFACE
PROTECTOR



SUPERIOR
CLEAN
ABILITY



VALUE FOR
MONEY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.



RangVilas™ ULTIMATE WEATHERPROOF EXTERIOR ADVANCE LUXURY EMULSION

LEVEL
APEX ULTIMA
PROTEK

HD MATT FINISH

RangVilas Ultimate Waterproof Exterior Luxury Emulsion is made with the high class technology that gives you superior features and a wide array of color choice.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a surface free from all waterproofing issues. Surface must be free from dirt, dust, algae/fungi & loose flaking paint etc.

PUTTY (If Required): Apply a thin coat of Aqua Walltech Wall Putty to fill any dents & cracks or to smoothen the surface. Allow it to dry for 6-8 hrs.

PRIMING: Apply a coat of "Global Wall Primer" by thinning with potable water and allow it to dry for 4-6 hrs.

APPLICATION: Apply 2-3 coats of "RangVilas Ultimate Waterproof Exterior Luxury Emulsion" by thinning with potable water 40% by volume. Maintain a gap of 4-6 hrs between coats. Avoid excess dilution for better performance.

**8 YEARS
WARRANTY***



ULTIMATE
DURABILITY



DUST
PROOF



SUPERIOR
CLEAN
ABILITY



VALUE FOR
MONEY

PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.

Colour Variants available with extra cost.





PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.
Colour Variants available with extra cost.

ECO PRIME

Matt Finish Wall Primer

MULTI SURFACE

LEVEL
ECONOMY
SPARK PRIMER

Eco Prime Matt Primer provides the excellent features like superior filling property, Alkaline resistant and good adhesion. It makes walls protected against fungi. Algae, dampness caused by lashing rain water.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a smooth and uniform surface. This can be done by scraping the old painted surface and removing the flaking particles and all the dirt or dust which is present on the surface.

MIXING: Stir and strain the material before using it, Now thin the primer with 25% to 30% of clean water by volume, but don't over-thin. Apply at least 2-3 coats for smooth finish with Brush or Roller.

APPLICATION: A brush, roller can be used to apply Global Paints Eco Prime Wall Primer". The equipment should be washed after use.

RECOATING: Let the coat dry, Leave for 2 to 4 hour, then apply another coat



PACK SIZE 01 Ltr. 04 Ltr. 10 Ltr. 20 Ltr.
Colour Variants available with extra cost.

NXONE

All in One Interior & Exterior Wall Primer

MULTI SURFACE

LEVEL
TRUE CARE
DUAL PRIMER

Nxone All in One Primer provides the excellent features like superior filling property, Alkaline resistant and good adhesion. It makes walls protected against fungi. Algae, dampness caused by lashing rain water.

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a smooth and uniform surface. This can be done by scraping the old painted surface and removing the flaking particles and all the dirt or dust which is present on the surface.

MIXING: Stir and strain the material before using it, Now thin the primer with 25% to 30% of clean water by volume, but don't over-thin. Apply at least 2-3 coats for smooth finish with Brush or Roller.

APPLICATION: A brush, roller can be used to apply Global Paints NXONE All in One Primer". The equipment should be washed after use.

RECOATING: Let the coat dry, Leave for 2 to 4 hour, then apply another coat





NXONE

PREMIUM WALL PRIMER INTERIOR & EXTERIOR

LEVEL
TRUE CARE

NXONE is a water base interior & exterior primer which gives a protective undercoat with alkali resistant property. It is suitable for interior plastered, masonry, POP or pre painted surfaces. It is specially formulated to give excellent adhesion to all interiors

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a smooth and uniform surface. This can be done by scraping the old painted surface and removing the flaking particles and all the dirt or dust which is present on the surface.

MIXING: Stir and strain the material before using it, Now thin the primer with 25% to 30% of clean water by volume, but don't over-thin. Apply at least 2-3 coats for smooth finish with Brush or Roller.

APPLICATION: A brush, roller can be used to apply Global Paints NXONE Interior & Exterior Wall Primer". The equipment should be washed after use.

RECOATING: Let the coat dry, Leave for 2 to 4 hour, then apply another coat.



PACK SIZE 01Ltr. 04Ltr. 10Ltr. 20Ltr.

Colour Variants available with extra cost.



INTERIOR



EXTERIOR



VELVESA

WATER BASE HI-GLOSS & ULTRA GLOSS ENAMEL

Applying Velvessa hi gloss water-based enamel requires proper surface preparation and specific brush or roller techniques to avoid visible streaks due to its fast-drying nature.

SURFACE PREPARATION

Clean the surface to remove dirt, grease, and dust.

Sand the surface lightly to create a grip for the paint.

Apply a suitable water-based primer to ensure a smooth base.

SURFACE PREPARATION

Use a high-quality synthetic bristle brush or a fine microfiber/foam roller designed for water-based paints.

Apply thin, even coats, working quickly and avoiding overworking the paint once it begins to tack up.

Apply two coats, allowing the recommended drying time (typically 2 to 3 hours) between coats.



PACK SIZE 01Ltr. 04Ltr. 10Ltr. 20Ltr.

Colour Variants available with extra cost.



HI-GLOSS



ULTRA GLOSS



COLORSmith

LEVEL
TRACTOR UNO

ACRYLIC WASHABLE DISTEMPER

SMOOTH WALL FINISH

Color Smith Acrylic Distemper is a water based interior wall paint. It is the best quality acrylic distemper which gives the walls a smooth and delightful matt finish that lasts for ages. A tested formulation of acrylic co-polymers binders used to give unmatched performance It also comes in a wide range of attractive shades

METHOD OF APPLICATION

SURFACE PREPARATION: First of all prepare a smooth and uniform surface. This can be done by scraping the old painted surface and removing the flaking particles and all the dirt or dust which is present on the surface.

PUTTY: Make the surface smooth by applying minimum two coats of "Aqua Walltech Wall Putty" allow the surface to dry for 6-8 hours. Rub the surface with emery paper 180 no. To further smoothen the surface.

APPLICATION: Apply one coat of "Water Thinnable Cement Primer". Take 1 Kg. of "Global Paints ColorSmith Acrylic Distemper" and Add 500- 600 ml. of water to make it thin for brushability and apply the first coat.

Apply the second coat after an interval of 6-8 hours



SUPER SMOOTH



EXTRA SHINE



LOW VOC & VALUE FOR MONEY



HIGHEST COVERAGE

PACK SIZE 01Kg. 02Kg. 05Kg. 10 Kg. 20Kg.

Colour Variants available with extra cost.



COLORPlus

UNIVERSAL STAINER

INTERIOR & EXTERIOR

A universal stainer is a concentrated liquid pigment added to base paints, such as emulsions, distempers, and enamels, to create custom colors or intensify existing shades. You mix a small amount of the high-pigment stainer into a larger volume of base paint to achieve the desired hue. The process involves shaking the stainer, adding the desired amount (typically a small percentage, like 5% by volume), and then thoroughly mixing it with the paint to ensure a uniform, streaking-free color



HIGH STRENGTH



INTER MISCIBLE



LIGHT FAST PIGMENT

PACK SIZE 200ml 100 ml 50ml





MAGIX HI-GLOSS SYNTHETIC ENAMEL

Global Shine Magix High Gloss Enamel paint offers a mirror like gloss which can be used both for exterior and interior surfaces mainly on mild steel, wooden and suitably prepared masonry surfaces. Formulated with alkyd and select colourants, it gives a long lasting glossy finish to every surface it touches.

MIRROR-LIKE FINISH: Magix high gloss enamel paint gives a mirror like gloss for doors, windows, grills and masonry surfaces making them look good for years.

TOUGH FILM: This high gloss enamel paint has an oil based protective covering that acts as a shield for your doors, windows, grills etc.

DURABILITY: The tough solvent based coating of this gloss enamel paint is suitable for Indian weather conditions, providing sustainable cover.

GREEN PRO CERTIFIED: Validates our effort in striving towards cleaner, more sustainable future.



HI-GLOSS
FINISH



FAST
DRYING



HIGHER
OPACITY



LONG
LASTING



EXCELLENT
COVERAGE

PACK SIZE 200ML. 500ML. 01 Ltr. 04 Ltr. 20Ltr.



MAGIX RED OXIDE METAL PRIMER

Global Shine Magix Red Oxide Primer is an oil modified alkyd based primer suitably pigmented with micro fine red oxide and extenders. This metal oxide primer is ideal for ferrous metal surfaces.

HIGH OPACITY: Berger red oxide primer has excellent opacity, providing good coverage to hide surface imperfections.

PROVIDES TOUGH FILM: Red oxide primer provides a tough film, making it durable and long-lasting.

FREE FROM HEAVY METALS: Global Magix red oxide primer is free from heavy metals.

EASY BRUSHABILITY: Global Magix Red oxide primer has Good Brushability.

GREEN PRO CERTIFIED: Global Magix Red oxide primer formula validates our effort in striving towards a cleaner, more sustainable future.



ANTI
RUST



EXCELLENT FLOW
AND LEVELLING



STRONG
ADHESIVE



EXCELLENT
BRUSHABILITY



MATT
FINISH

PACK SIZE 200ML. 500ML. 01 Ltr. 04 Ltr. 20Ltr.



MAGIX PREMIUM WHITE PRIMER

Global Shine Magix White Primer (ST) is an oil modified alkyd based primer pigmented with micro fine pigments and extenders. This is ideal for plaster surfaces, wooden and ferrous –metallic substrate.

HIGH OPACITY: Global Shine Magix White Primer Paint has great opacity offering good coverage against surface imperfections.

EASY BRUSHABILITY: Global Shine Magix White Primer has Good Brushability.

EXCELLENT WHITENESS: Global Shine Magix White Primer (ST) provides excellent whiteness, consistent finish and is ideal for a base coat.

FREE FROM HEAVY METALS: Global Shine Magix White Primer (ST) is free from heavy metals.

GREEN PRO CERTIFIED: Global Shine Magix White Primer (ST) validates our effort in striving towards a cleaner, more sustainable future.



SUPERIOR
GLOSS



MOISTURE
RESISTANT



SUPERIOR
BONDING



EXCELLENT
BRUSHABILITY



WOOD
FINISH

PACK SIZE 200ML. 500ML. 01 Ltr. 04 Ltr. 20Ltr.



AQUA walltech™ WALL PUTTY

LEVEL
INDIA'S BEST
WALL PUTTY

WHITE CEMENT BASE PUTTY

Aqua Walltech Wall Putty is a water resistant white cement and polymer based putty which provides a strong base on concrete (internal and external) and ceilings. It is applied before painting of the wall. It fills the pores of the walls and ceiling thereby providing a white smooth and dry surface for painting. Being water resistant it provides a protective base which prevents expensive paints from falling.

Aqua Walltech White Cement Wall Putty has special added polymers provides a strong base ensuring a longer life for the painted surface.



EXTRA
WHITENESS



HIGH
COVERAGE



ULTRA
SMOOTHNESS

PACK SIZE 05 Kg. 20 Kg. 40 Kg.

Waterproof and acrylic putty available with extra cost.



AQUA walltech™ WHITE CEMENT WHITE WASH DECORATIVE

Color Smith is one of the best "Whitest White Cement" It is in developing a pristine white canvas for crafting architectural elegance. It's the key ingredient in the application of decorative cement paints, mosaic tiles, terrazzo floorings and marble laying. Its remarkably high refractive index and high opacity imparts a gleaming luster and smooth finish to surfaces.

Besides, it's also a significant constituent in wall finishes such as Grit Wash, Stone crete and Tyrolean



EXCELLENT
ADHESION



COLOR
VARIETY
AVAILABLE



MULTI
PURPOSE
USE



QUICK DRYING
CAPACITY

PACK SIZE 50Kg. 25Kg. 5Kg. 1Kg.

Colour Variants available with extra cost.



COLORSmith

CEMENT PAINT

INTERIOR & EXTERIOR

Color Smith is one of the best "Whitest White Cement" It heGss in developing a pristine white canvas for crafting architectural elegance. It's the key ingredient in the application of decorative cement paints, mosaic tiles, terrazzo floorings and marble laying. Its remarkably high refractive index and high opacity imparts a gleaming luster and smooth finish to surfaces.

Besides, it's also a significant constituent in wall finishes such as Grit Wash, Stone crete and Tyrolean



EXCELLENT
ADHESION



COLOR
VARIETY
AVAILABLE



MULTI
PURPOSE
USE



QUICK DRYING
CAPACITY

PACK SIZE 20Kg. 25Kg.

Colour Variants available with extra cost.



AQUA walltech™ TILE ADHESIVE

INTERIOR & EXTERIOR

TILE & STONE EXPERT POLYMER MODIFIED

POLYMER MODIFIED ADHESIVE TO FIX MARBLE SLABS & MOSAIC,
STONE & TILE ON INTERNAL & EXTERNAL WALLS & FLOOR SURFACES.



NON SLIP



NO
HOLLOW
SOUND



POLYMER
MODIFIED


PACK SIZE 20Kg.



EMULSIONS SHADES



DISTEMPER SHADES

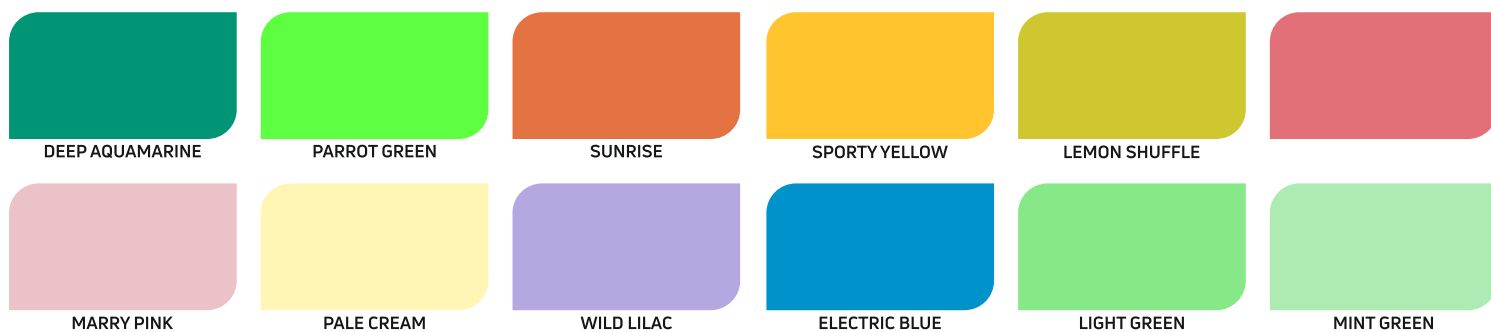

DIRECT EMULSION SHADES



STAINER SHADES



OUR NEW PRODUCTS



OUR UPCOMING PRODUCTS

TARPIN OIL

LIQUID
WATERPROOFING
COMPOUND

EPOXY GROUT
&
TILE GROUT

METALLIC PAINT

BLACK JAPAN



Introducing
NG NEXT
GENERATION
PRODUCTS



Global Shine Paints (P.) Ltd

H.O. : Office Suite, Gaur City Mall, Techzone-IV, Greater Noida- 201306 (UP)
Unit-II: Plot No. 38, Khata 45, Mandi Bypass, Patna-80009 (Bihar)
E-mail : care@globalshinepaints.com, Website: www.globalshinepaints.com

CUSTOMER CARE: +91-8800-98-0871, 8800-98-0241

